

Dynamelt™ M Series Adhesive Supply Unit

The Dynamelt™ M Series hot melt adhesive supply units are PLC-based and provide accurate, proportionate temperature control for the hopper, hoses and applicators. The M Series units are available in three cabinet sizes and offer four hopper sizes. Temperature set points are operator-selected for all zones.

Dynamelt™ M Series:

- Up to four separate adjustable melting stages.
- Melts only the adhesive demanded for the application, virtually eliminating char.
- Four hopper sizes available in single and dual configurations.
- Additional melt grids can be added to meet additional adhesive volume requirements.
- Durable precision gear pumps.

Precision

Up to eight precision gear pumps per unit achieve $\pm 2\%$ output accuracy in either single or dual output design.

Modular Design

Additional melt grids, gear pumps, and hoppers can be added to meet application needs.

Innovation


Patented melt grids pre-melt the adhesive, gradually increasing the temperature to prevent adhesive degradation and energy loss.



The Dynatec Difference

Melt-on-Demand Hopper

ITW Dynatec's patented vertical, unheated hoppers only melt the amount of adhesive required by the application. Most of the adhesive in the hopper remains at a much lower temperature, even in a solid state. Melting only the amount of adhesive required means faster start-ups, lower energy costs, better viscosity control, and reduced fumes.

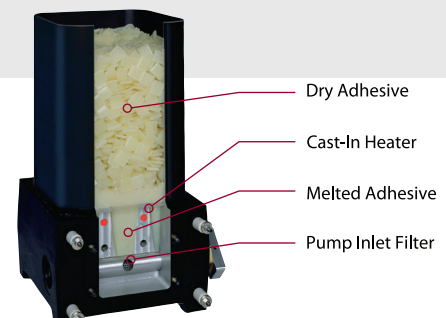


System	M35	M70	M140	M210 / M280
Hopper Capacity	35kg (75lbs)	70kg (155lbs)	140kg (310lbs)	210kg (460lbs) / 280kg (574lbs)
Operating Temperature	40 to 232°C (100 to 450°F)	40 to 232°C (100 to 450°F)	40 to 232°C (100 to 450°F)	40 to 232°C (100 to 450°F)
Melt Rate (per hour)*	18-65 kg/hr (40-143 lb/hr)	27-95 kg/hr (59-209 lb/hr)	34-115 kg/hr (75-253 lb/hr)	45-145 kg/hr (99-319 lb/hr)
Gear Pumps Standard†	.15 - 45 cc/rev	.15 - 45 cc/rev	.15 - 45 cc/rev	.15 - 45 cc/rev
Number of Gear Pumps per Unit	1-2	1-4	1-4	1-8
Hose/Head Output Zones	1-4	1-8	1-8	1-12 / 1-18
Aux Output Zones	1-4	1-8	1-8	1-12 / 1-18
Max. Working Hydraulic Pressure	69 BAR (1,000psi)	69 BAR (1,000psi)	69 BAR (1,000psi)	69 BAR (1,000psi)
Electrical Service Standard	200-240 VAC 3 Phase 50/60 Hz	200-240 VAC 3 Phase 50/60 Hz	200-240 VAC 3 Phase 50/60 Hz	200-240 VAC 3 Phase 50/60 Hz
Electrical Service Standard	380 VAC 3 Phase Y 50/60 Hz	380 VAC 3 Phase Y 50/60 Hz	380 VAC 3 Phase Y 50/60 Hz	380 VAC 3 Phase Y 50/60 Hz
Total Amp Draw	50 Amp, 240 VAC, 3 Phase	100 Amp, 240 VAC, 3 Phase	100 Amp, 240 VAC, 3 Phase	150/200 Amp, 240 VAC, 3 Phase
Working Viscosity	500 - 50,000 cps	500 - 50,000 cps	500 - 50,000 cps	500 - 50,000 cps

*Melt rates vary with adhesive type.

Available Features/Options

- Digital RPM readout
- Multi-lingual display capabilities
- Programmable sequential heat zone startup
- Programmable temperature setback
- High/low alarm for each zone
- Separate pump/motor speed control
- Available PLC systems include DynaControl™, Allen Bradley, Seimens, etc. (Dynacontrol™ not available on M280)
- Dual hopper configurations available (excludes M35)
- Pressure transducers to monitor pressure
- Automatic level controls

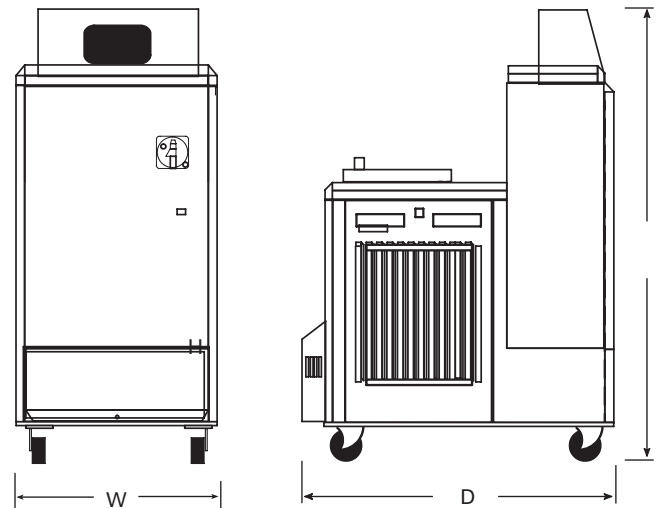

Dimensions	M35	M70	M140	M210	M280
Height (H)	135cm (53in)	168cm (66in)	168cm (66in)	168cm (66in)	198cm (78in)
Depth (D)	87.8cm (34.6in)	130cm (51.2in)	130cm (51.2in)	130cm (51.2in)	156cm (61.3in)
Width (W)	60cm (23.5in)	85cm (33.5in)	85cm (33.5in)	118cm (46.5in)	187cm (73.7in)

CHINA

ITW Dynatec Suzhou
Unit2, B1 Building
No.9 Weixin Road
SIP, Suzhou, China 215122
Telephone +86.512.6289.0620
Fax +86.512.6289.0621
dynatecsuzhou@itwdynatec.cn

AMERICAS

ITW Dynatec
31 Volunteer Drive
Hendersonville, TN 37075
Telephone 615-824-3634
+1.800.860.6150
Fax +1.615.264.5248
dynatec@itwdynatec.com

JAPAN

ITW Dynatec K.K.
Tsukimura Building 5th Floor
26-11, Nishikamata 7-chome
Ota-ku, Tokyo 144-0051, Japan
Telephone +81.3.5703.5501
Fax +81.3.5703.5505
info@itwdynatec.co.jp

EUROPE, AFRICA & MIDDLE EAST

ITW Dynatec GmbH
Industriestrasse 28
D-40822 Mettmann, Germany
Telephone +49.210.4915.0
Fax +49.210.491.5111
e.mail@itwdynatec.de

ITW Dynatec TenPlus
ZI Croix de Raville
28500 Cherisy, France
Telephone +33(0)2.37.62.56.47
Fax +33(0)2.37.62.56.40
info@itwdynatec.fr